

5th Slide Set Cloud Computing

Prof. Dr. Christian Baun


Frankfurt University of Applied Sciences
(1971–2014: Fachhochschule Frankfurt am Main)
Faculty of Computer Science and Engineering
christianbaun@fb2.fra-uas.de

Agenda for Today

- Google App Engine
 - Google App Engine APIs
 - Required software
 - Working with the Google App Engine
 - Simple example with the Google App Engine
 - Resource limitations (Quotas)
 - Realize a guestbook with the Google App Engine

Google App Engine (GAE)

- Platform service for web applications (Python, Java, Go and PHP)
 - Available since May 2008
- Scales automatically as required
- Usage is free of charge under some of quantity limits
- Applications can use different infrastructure and storage services

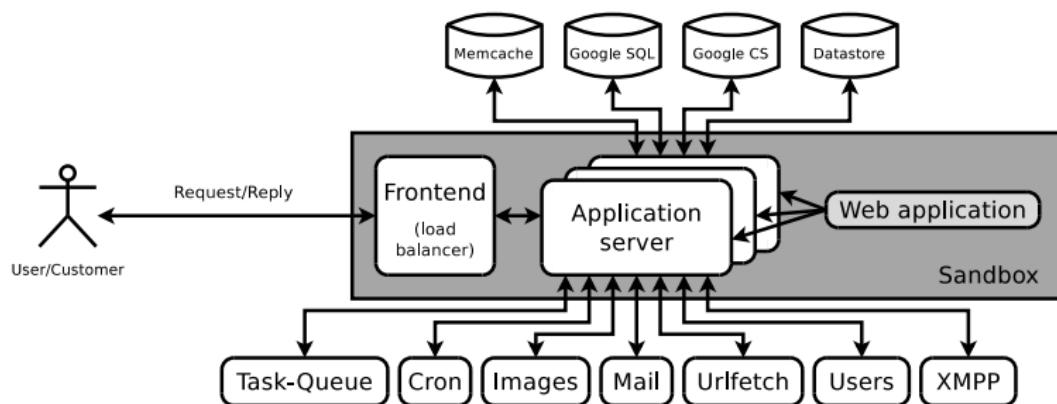

- Free reimplementations: AppScale, typhoonAE (\dagger), JBoss CapeDwarf


Google App Engine APIs (1/5)

- **Authentication (Users)**

- Authentication/Authorization is possible via Google accounts
- Implementing an own authentication solution is not necessary

- **Datastore**


- Persistent storage, implemented as a key/value database
- Transactions are atomic
- For the definition, retrieval and manipulation of data, an own language, the GQL (Google Query Language) is provided
 - GQL has similar with SQL (Structured Query Language)

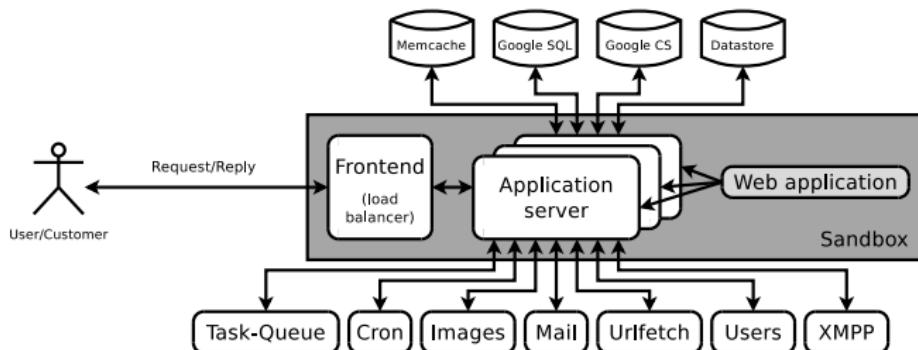

Google App Engine APIs (2/5)

• Memcache

- High-performance storage for temporary data, consisting of main memory
- Very fast access times
- Each record is stored with a unique key
- For each record, a time to live in seconds is specified
 - If the time to live has expired, the record will be removed from memcache
- Depending on the workload of the memcache, it can happen that records are erased earlier

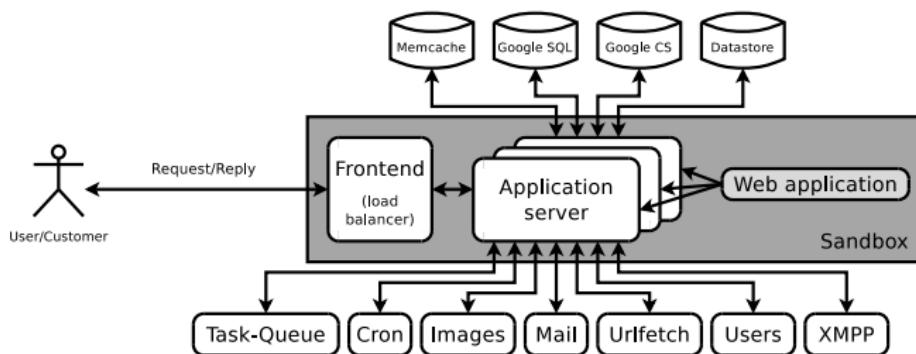


Google App Engine APIs (3/5)

• URL Fetch

- Allows to access internet content
- Communication is possible via RESTful web services
 - Supported methods: GET, POST, PUT, DELETE and HEAD

• Mail

- Sending and Receiving emails via the Gmail gateway
- The sender address of the e-mail cannot be freely selected
 - Allowed sender addresses are the email address of the logged in user or the email address of the owner of the application

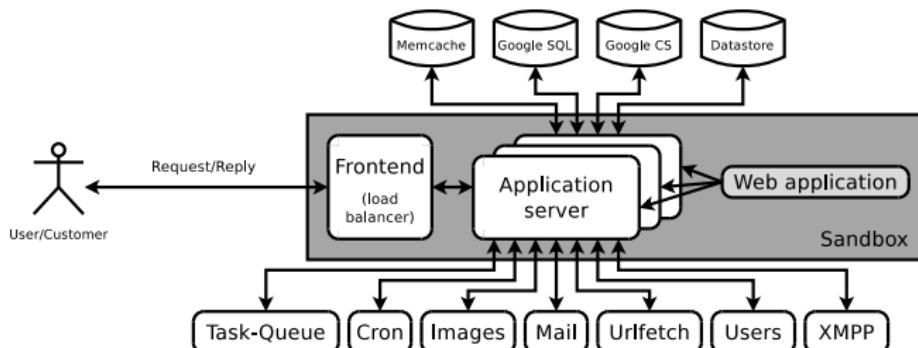

Google App Engine APIs (4/5)

- **Google Cloud Storage**


- Option to access/create objects inside the Google CS storage service

- **Image Manipulation**

- Functions to rotate, flip, crop images and to change the image size

- **Messaging via XMPP**

- Messages can be sent to any XMPP-compatible messaging system (e.g. Google Talk) and can be received

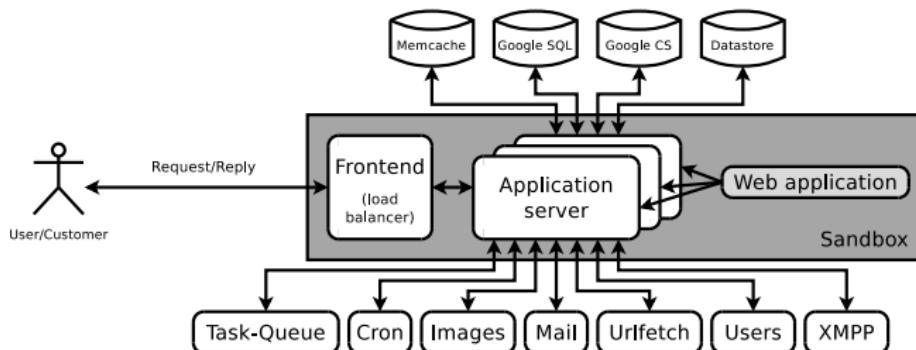


Google App Engine APIs (5/5)

- **Google Cloud SQL**

- Is a database service for relational databases
- Users can choose between MySQL and PostgreSQL

- **Cron**

- The cron service allows to configure regularly scheduled tasks that operate at defined times or regular intervals
- A cron job makes an HTTP GET request to a URL as scheduled

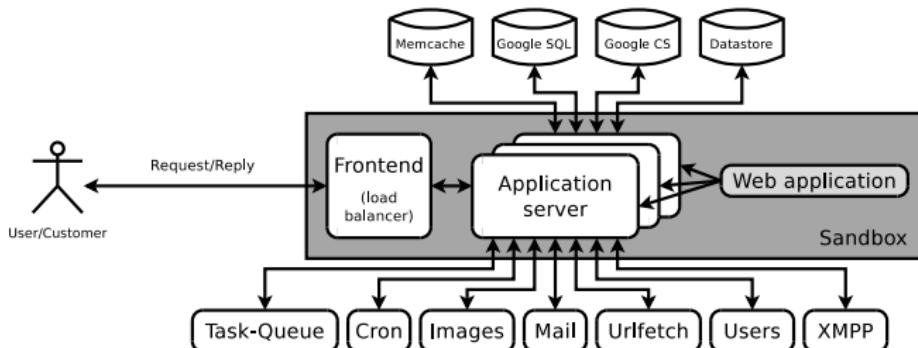

Working with the GAE

- Applications are available online:
`http://<application_name>.appspot.com`
- The dashboard contains all important information about the application
`https://console.cloud.google.com/appengine`
- Multiple versions of each application can be uploaded
 - Each version can be accessed directly
`http://<version>.latest.<application_name>.appspot.com`
 - Good for testing

Required Software

- Browser
- Google App Engine SDK for Python (and/or JAVA/PHP/Go)
 - <https://cloud.google.com/appengine/downloads>
 - Available for Linux/UNIX, MacOS X and Windows
- Some useful tools
 - Google Cloud Tools for Eclipse
 - PyDev extension for Eclipse (for Python applications)
 - <http://pydev.org>

Python under Linux

- GAE supports only Python 2.7

```
$ python --version  
Python 2.7.2
```

- Installation of the SDK

```
$ wget https://storage.googleapis.com/appengine-sdks/featured/  
google_appengine_1.9.63.zip  
$ unzip google_appengine_1.9.63.zip  
$ echo -e "export PATH=\$PATH:~/google_appengine \n" > ~/.bashrc  
$ bash  
$ appcfg.py -h  
Usage: appcfg.py [options] <action>  
...
```

The Python 2.5.2 support has expired

Hard Limits of the GAE

- Only few programming languages are supported
- Communication with other web applications or servers is only possible via URL Fetch, XMPP or email
 - Only via the ports 80, 443, 4443, 8080-8089, 8188, 8444 and 8990
 - Communication via FTP or SSH is impossible
 - Maximum time, allowed for a response: 60 s
- Maximum size of...
 - HTTP replies: 32 MB
 - Emails including the attachment(s): 1 MB
 - Incoming and outgoing XMPP messages: 100 kB
 - Images, which are processed by the API: 1 MB
 - Records in the datastore and memcache: 1 MB
- Read-only access to the file system

Quotas and pricing

<https://cloud.google.com/appengine/quotas>

<https://cloud.google.com/appengine/pricing>

GAE Example – Guestbook

- Objective: Develop a guestbook
- Main features:
 - Authentication information of Google are used
 - Data is stored in the Datastore
 - Records can be erased
 - Web pages are created using the webapp framework

This example uses Python 2.7 and closely follows this tutorial:

Developing and deploying an application on Google App Engine

<http://www.youtube.com/watch?gl=DE&hl=de&v=bfg0-LXGpTM>

Configuration File – app.yaml

- For each application, a configuration file `app.yaml` must exist
 - `application`: Application name
 - `version`: Version of the application
 - `runtime`: Runtime environment
 - `python27` ⇒ Python 2.7
 - `api_version`: API-Version of the GAE
 - Version 1 is the latest one
 - `handlers`: URLs mapped to scripts
 - In this example, all requests to the Python script are forwarded to `main.py`

```
application: cloud-vorlesung
version: 1
api_version: 1
runtime: python27
threadsafe: no

handlers:
- url: .*
  script: main.py
```

Mini Application

- For each application, a directory with the equal name should exist locally

```
$ mkdir cloud-vorlesung  
$ cd cloud-vorlesung
```

- Create the mini application in `main.py`

```
1 #!/usr/bin/env python  
2  
3 print "Hallo Vorlesung"
```

- Start with the mini application with the development server

```
$ dev_appserver.py cloud-vorlesung/  
INFO    2013-10-05 14:08:48,702 sdk_update_checker.py:245] Checking for updates to the SDK.  
INFO    2013-10-05 14:08:49,113 api_server.py:138] Starting API server at: http://localhost:41116  
INFO    2013-10-05 14:08:49,296 dispatcher.py:164] Starting module "default" running at: http://localhost:8080  
INFO    2013-10-05 14:08:49,297 admin_server.py:117] Starting admin server at: http://localhost:8000
```

Test Mini Application



- The development server returns information about what happened

```
$ dev_appserver.py cloud-vorlesung/
INFO    2013-10-05 14:16:08,991 sdk_update_checker.py:245] Checking for updates to the SDK.
INFO    2013-10-05 14:16:09,545 api_server.py:138] Starting API server at: http://localhost:33666
INFO    2013-10-05 14:16:09,636 dispatcher.py:164] Starting module "default" running at: http://localhost:8080
INFO    2013-10-05 14:16:09,638 admin_server.py:117] Starting admin server at: http://localhost:8000
INFO    2013-10-05 14:16:12,391 module.py:593] default: "GET / HTTP/1.1" 200 16
INFO    2013-10-05 14:16:12,785 module.py:593] default: "GET /favicon.ico HTTP/1.1" 200 16
```

- There was a successful request ⇒ HTTP status code 200

Simple Output with a better Source Code Basis

app.yaml

```
application: cloud-vorlesung
version: 2
api_version: 1
runtime: python27
threadsafe: no

handlers:
- url:.*
  script: main.py

libraries:
- name: webapp2
  version: latest
```

```
$ dev_appserver.py cloud-vorlesung/
```



main.py

```
1 #!/usr/bin/env python
2 import os, sys
3 import wsgiref.handlers
4 import webapp2
5 from google.appengine.ext.webapp.util import run_wsgi_app
6
7 class SayHello(webapp2.RequestHandler):
8     # Method to process HTTP GET requests
9     def get(self):
10         self.response.headers['Content-Type'] = 'text/plain'
11         self.response.out.write('Hello! This is the SayHello handler')
12
13 # When the application receives a request, it tries to find the
14 # matching entry and then calls the corresponding handler
15 app = webapp2.WSGIApplication([('\/', SayHello)],
16                               debug=True)
17
18 def main():
19     # Runs a WSGI application in App Engine's CGI environment
20     run_wsgi_app(app)
21
22 # Program can act as either reusable module, or standalone program
23 if __name__ == "__main__":
24     main()
```

- A handler processes the HTTP GET requests
 - The HTTP GET requests are assigned to a class

Guestbook – main.py (1/2)

```
1 #!/usr/bin/env python
2 import os, sys
3 import wsgiref.handlers
4 import webapp2
5 from google.appengine.ext import db
6 from google.appengine.ext.webapp.util import run_wsgi_app
7 from google.appengine.ext.webapp import template
8
9 class guestbook(db.Model):
10    message = db.StringProperty(required=True)                      # Name of the datastore: guestbook
11    when = db.DateTimeProperty(auto_now_add=True)                   # Define the structure of the datastore
12    who = db.StringProperty()
13
14 class ShowGuestbookPage(webapp2.RequestHandler):
15    def get(self):                                                 # Method to process HTTP GET requests
16        shouts = db.GqlQuery('SELECT * FROM guestbook ORDER BY when DESC') # Request for the Datastore
17        values = {'shouts': shouts}
18        self.response.out.write(template.render('main.html', values)) # Forward the data to main.html
19
20 class MakeGuestbookEntry(webapp2.RequestHandler):
21    def post(self):                                              # Method to process HTTP POST requests
22        shout = guestbook(message=self.request.get('message'),      # Grab the data from the HTML form
23                            who=self.request.get('who'))
24        shout.put()                                                 # Write into the datastore
25        self.redirect('/')                                         # Redirect to URI /
```

Guestbook – main.py (2/2)

```
26 class EraseAllEntries(webapp2.RequestHandler):
27     def post(self):
28         erase_all_query = guestbook.all(keys_only=True)
29         db.delete(erase_all_query.fetch(limit=None))
30         self.redirect('/')
31
32 # When the application receives a URI request, it tries to find the
33 # matching entry and then calls the corresponding handler
34 app = webapp2.WSGIApplication([
35     ('/', ShowGuestbookPage),
36     ('/make_entry', MakeGuestbookEntry),
37     ('/erase_all', EraseAllEntries)],
38     debug=True)
39
40 def main():
41     # Runs a WSGI application in App Engine's CGI environment
42     run_wsgi_app(app)
43
44 if __name__ == "__main__":
45     main()
```

Guestbook – main.html

```
1 <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
2      "http://www.w3.org/TR/html4/loose.dtd">
3 <html>
4 <head><title>Simple Guestbook with the Google App Engine</title></head>
5 <body>
6
7 {% for shout in shouts %}
8 <div>
9   {% if shout.who %}
10    <b>{{shout.who}}</b>
11   {% else %}
12    <b>Anonymous</b>
13   {% endif %}
14   says:
15   <b>{{shout.message}}</b>
16 </div>
17 {% endfor %}
18
19 <p>
20
21 <form action="make_entry" method="post" accept-charset="utf-8">
22 Name: <input type="text" size="20" name="who" value="" if="who">
23 Message: <input type="text" size="20" name="message" value="" if="message">
24 <input type="submit" value="Send"></form>
25
26 <form action="erase_all" method="post" accept-charset="utf-8">
27 <table border="0" cellspacing="5" cellpadding="5">
28   <tr><td align="center"><input type="submit" value="Erase DB"></td></tr>
29 </table></form>
30
31 </body></html>
```

Result

A screenshot of a web browser window titled "localhost:8080". The page contains a form with two input fields: "Name:" and "Message:", and a "Send" button. Below the form is a "Erase DB" button.

Name: Message: Send

Erase DB

A screenshot of a web browser window titled "localhost:8080". The page displays two messages:
Anonymous says: I don't understand this example
Christian says: This is very simple
Below the messages is a form with two input fields: "Name:" and "Message:", and a "Send" button. There is also a "Erase DB" button.

Anonymous says: I don't understand this example

Christian says: This is very simple

Name: Message: Send

Erase DB

Helpful Tool: Development Console

- Part of the development server
 - Available at <http://localhost:8000>

The screenshot shows the Google App Engine Development Console interface. At the top, there's a header bar with the URL "localhost:8000/datastore?kind=guestbook". Below the header, the title "Google App Engine" is displayed next to "Development SDK 1.8.3". On the left, a sidebar lists various tools: Instances, Datastore Viewer (selected), Datastore Indexes, Datastore Stats, Interactive Console, Memcache Viewer, Blobstore Viewer, Task Queues, Cron Jobs, XMPP, Inbound Mail, and Full Text Search. The main content area is titled "dev~cloud-vorlesung-hrd". It features a "Datastore Viewer" section with tabs for "Entity Kind" (selected), "List Entities", "Create New Entity", and "Select a different namespace". Under "Entity Kind", a dropdown is set to "guestbook", and there are buttons for "Delete" and "Flush Memcache". A table lists two entities:

	Key	Write Ops	ID	Key Name	message	when	who
<input type="checkbox"/>	ahdkZXZ...	8	5092662981951488		I don't understand this exa...	2013-10-05 19:14:42	
<input type="checkbox"/>	ahdkZXZ...	8	5655612935372800		This is very simple	2013-10-05 19:14:29	Christian

The datastore is stored locally at `/tmp/appengine.<application_name>.<user>/datastore.db`

Upload Application and check Log Data

- Application upload via appcfg.py from the SDK

```
$ appcfg.py --email=wolkenrechnen@gmail.com update cloud-vorlesung/
```

- Get the log data via appcfg.py

```
$ appcfg.py --email=wolkenrechnen@gmail.com request_logs cloud-vorlesung/ logs.txt
```

```
$ cat logs.txt
87.178.89.156 - - [29/Apr/2010:06:01:20 -0700] "GET / HTTP/1.1" 200 540 - "Mozilla/5.0
(X11; U; Linux i686; de; rv:1.9.0.6) Gecko/2009020409 Iceweasel/3.0.14 (Debian-3.0.14-1),gzip(gfe)"
87.178.89.156 - - [29/Apr/2010:06:01:20 -0700] "GET /favicon.ico HTTP/1.1" 404 124 - "Mozilla/5.0
(X11; U; Linux i686; de; rv:1.9.0.6) Gecko/2009020409 Iceweasel/3.0.14 (Debian-3.0.14-1),gzip(gfe)"
```

- IP address of the client
- Date of the request
- Time of the request
- HTTP request
- HTTP status code (server response)
- Size of the response in bytes
- Client information
- ...